


Precision Delay Lines

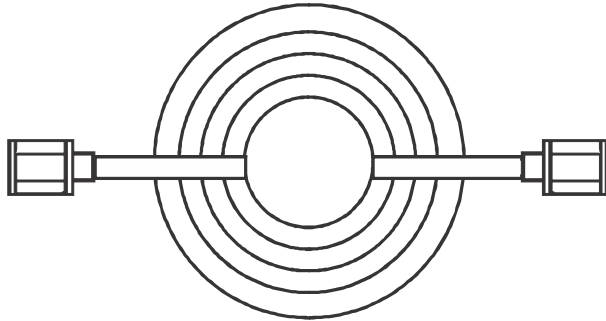

DELAY CALCULATION FORMULA

Length of Cable = $V_p \times Dt (1) / 1.016$

Where: V_p = Velocity of Propagation

Dt = Delay in nanoseconds

Length = Cable length in feet

PACKAGING: Delay lines are supplied in circular coils with cable ties. Connectors can be bulkheads/4-hole panel types.

We specialize in making **Precision Coaxial Delay Lines**. These are used for delay, calibration and filtering signals.

TECHNICAL DATA & FEATURES

- Standard tolerances : ± 0.5 nanosecond
- Special tolerance: ± 20 picosecond
- DC~18 GHz frequency range
- Delay Lines DL04 use highly phase stable LDPTFE cable which is stable over $-40^\circ \sim +85^\circ\text{C}$. This minimizes system compensation needed for delay variations.
- Delay Lines DL02 are lower cost type.
- Low attenuation per nanosecond of delay

APPLICATIONS

- Radar systems • ECM systems • Altimeters

DL02 Electrical & Mechanical Specifications

Dimensions	inches	mm
Jacket	0.163	4.14
Bend Radius (min)	0.8	21
Weight	0.033 (lb/ft)	0.047 Kg/m
Temperature Range	$-55^\circ \sim +125^\circ\text{C}$	
Impedance	50 ohms	
Velocity of Propagation	70 %	
Delay	4.76 ns/m	
Shielding Effectiveness	Better than 90 dB	
Capacitance	29.9 pF/ft	

DL02 Attenuation & Power Handling Data

Freq. GHz	Insertion Loss		Power Watts
	dB/ft	dB/m	
2	0.17	0.56	190
3	0.23	0.75	150
6	0.32	1.07	100
12	0.51	1.67	60
13.5	0.55	1.80	55
18	0.66	2.16	45

DL04 Electrical & Mechanical Specifications

Dimensions	inches	mm
Jacket	< 0.180	< 4.8
Bend Radius (min)	0.9	23
Weight	0.054 kg/m	
Temperature Range	$-55^\circ \sim +200^\circ\text{C}$	
Impedance	50 ohms	
Velocity of Propagation	76 %	
Delay	4.39 nS/m	
Shielding Effectiveness	> -90 dB	
Capacitance	26.7 pF/ft	



DL04 Attenuation & Power Handling Data

Freq. GHz	Insertion Loss		Power Watts
	dB/ft	dB/m	
0.4	0.07	0.23	900
1	0.10	0.33	550
3	0.19	0.62	290
6	0.25	0.83	210
10	0.36	1.18	150
18	0.49	1.62	110

Shown trademarks are property of their respective owners.

While the information contained herein in this catalog, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.

Precision Delay Lines DL04 Series with a delay of 4.5ns ± 0.5ns

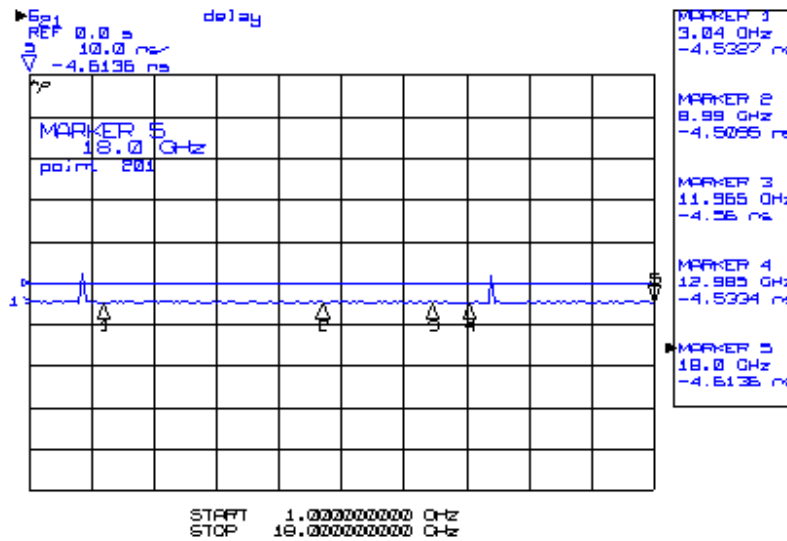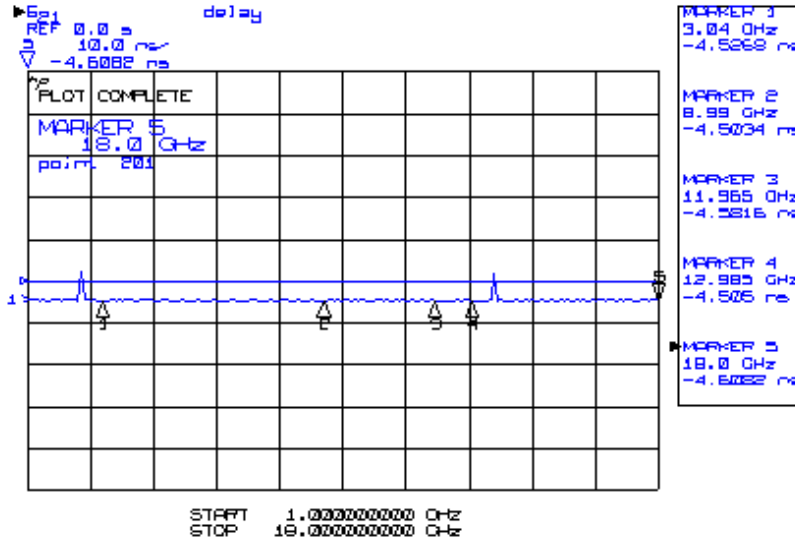

Ordering Codes Description

(Type) (Connector 1) (Connector 2) (Delay)
 DL - □ - □ (□ / □) - □ (□ / □) - □
X **1 2 3** **1 2 3** **Z**

X	Type	02 = low loss ; 04 = ultra low loss
1	Connector Series	SMA = SMA ; TNC = TNC
2	Male/Female Designator	M = Male
3	Orientation of Connector	ST = Straight
Z	Delay (nanosecond)	100 nanosecond = 100NS ; 25 nanosecond = 25NS

Delay line of 50 nanosecond with SMA (Male) on both sides = DL-04-SMA(M/ST)-SMA(M/ST)-50NS

Shown trademarks are property of their respective owners.

While the information contained herein in this catalog, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.