

MF02-Series Pre-connectorized Cable Sets are designed as flexible alternative to 0.141 inch semi-rigid types. MF02 have similar electrical and RF performance as 0.141" semi-rigid but WITHOUT the routing problems of semi-rigid types. MF02 cable sets are highly flexible and can be easily routed inside racks, rack-rack or inside LRU's. Designed for use upto 18 GHz with rugged cable-connector joints.



**FLEXIBLE SUBSTITUTE TO SEMI-RIGID**

MF02 cable sets are flexible alternatives to semi-rigid cables. RF and electrical parameters like loss, power handling of MF02 types are same as 0.141 inch semi-rigid types, but MF02 cable sets are flexible as compared to semi-rigid which are quite rigid. MF02 types overcome the routing problems of semi-rigid due to their flexibility. Compared to semi-rigid types there is no need for hand or machine bending

**CONFORMANT MIL STANDARDS**

- Cable conforms to MIL-C-17
- Connectors conform to MIL-PRF-39012

**APPLICATIONS**

- Military and defense systems interconnect
  - General purpose test applications
  - R&D labs
- Environmental and test chambers

**Attenuation & Power Handling Data**

Frequency	Insertion Loss		Power (watts)
	dB/ft	dB/m	
100 MHz	0.04	0.13	990
400 MHz	0.08	0.26	470
1 GHz	0.13	0.43	450
2 GHz	0.17	0.56	190
3 GHz	0.23	0.75	150
5 GHz	0.30	0.98	180
10 GHz	0.45	1.49	120
12 GHz	0.51	1.67	60
13.5 GHz	0.55	1.80	55
18 GHz	0.66	2.16	45

**Physical & Mechanical Specifications**

Dimensions	inches	mm
Center Conductor	0.037	0.95
Jacket	0.163	4.14
Bend Radius (min)	0.8	21
Weight	0.033 (lb/ft)	0.047 Kg/m
Temperature Range	-55°C ~ +125°C	

**Electrical Specifications**

Impedance	50 ohms
Velocity of Propagation	70 %
Shielding Effectiveness	better than 90 dB
Capacitance	29.9 pF/ft
Operating Frequency	20 GHz


Shown trademarks are property of their respective owners.

While the information contained herein in this catalog, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.


# Multi-Flex Low Loss, Pre-Connectorized Cable Sets, DC~18 GHz, MF02-Series

for rugged military, defense and T&M applications upto 18 GHz use

## S11 Plot of 1m MF02 Pre-connectorized cable set with SMA(M) on both sides

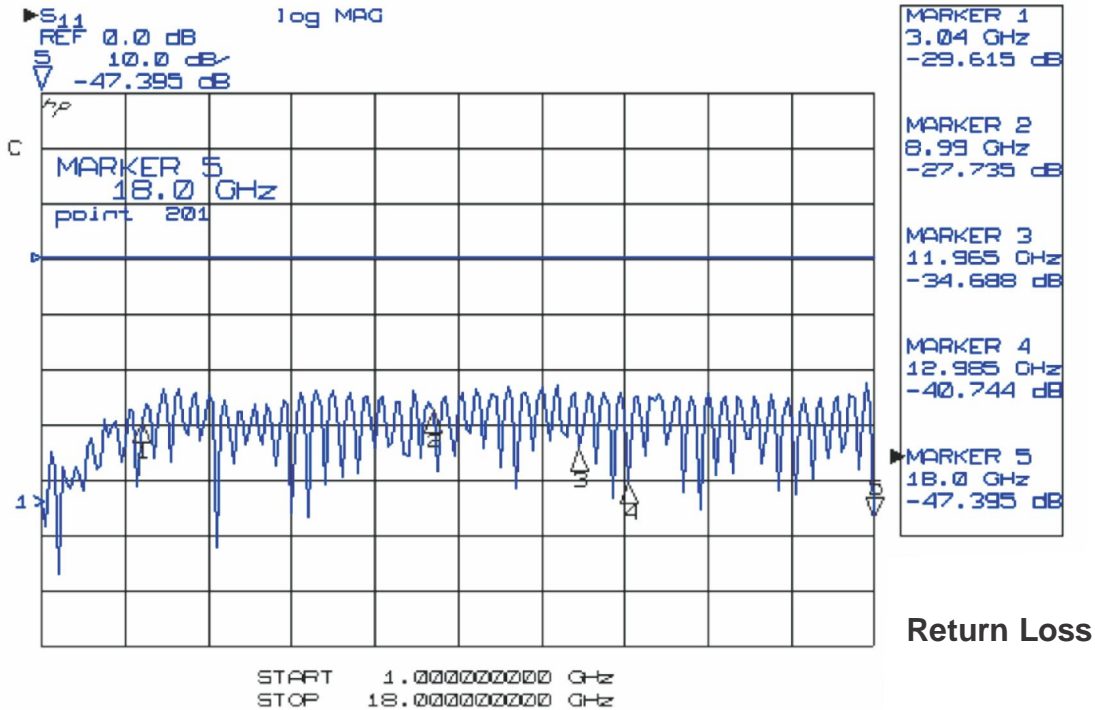


## S12 Plot of 1m MF02 Pre-connectorized cable set with SMA(M) on both sides

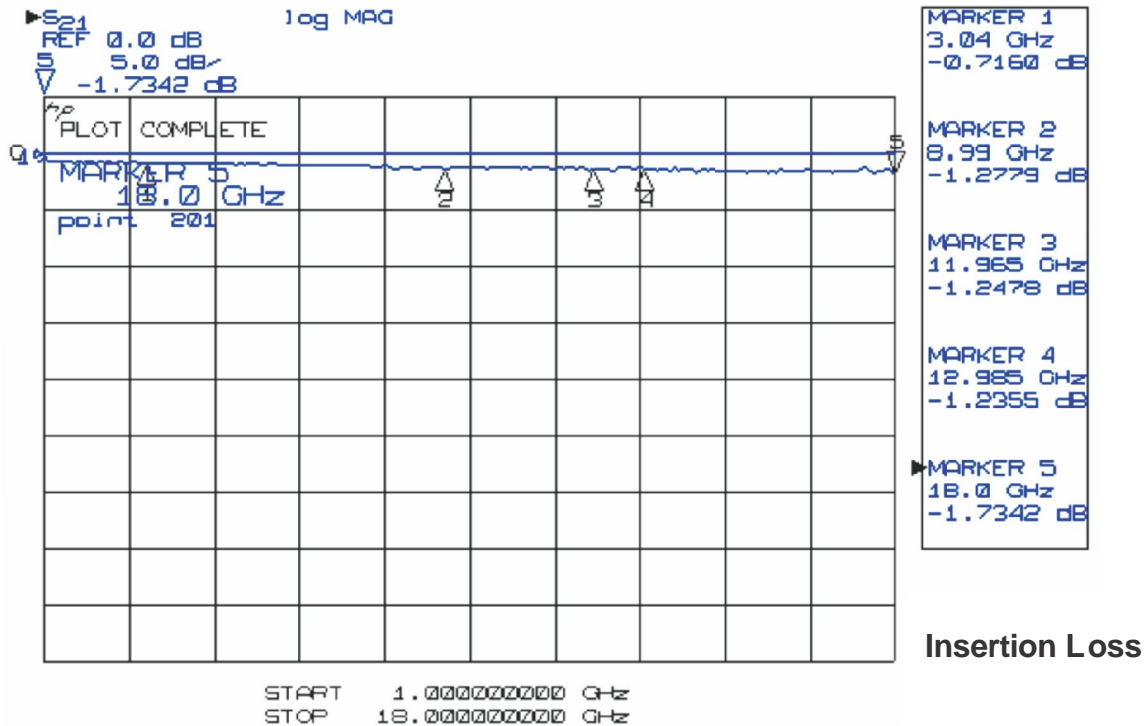

Shown trademarks are property of their respective owners.

While the information contained herein in this catalog, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.

### MF02 Cable Construction

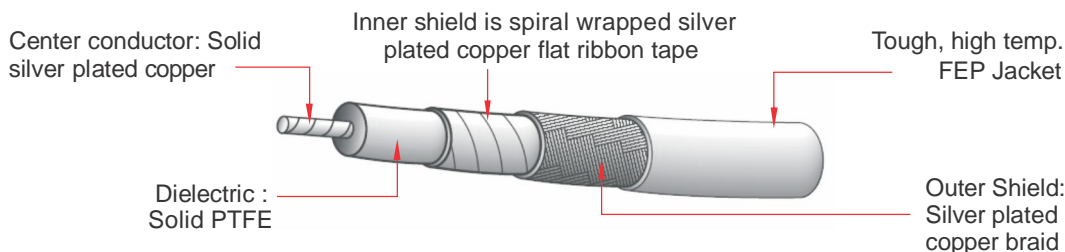

### Connectors Specifications

Specifications	SMA Connectors	N Connectors	TNC Connectors
Outer Conductor	Brass/Stainless Steel, Gold plated	Copper alloy	Copper Alloy
Center Conductor	Brass, Gold Plated	Brass, Gold Plated	Brass, Gold Plated
Insulation	PTFE	PTFE	PTFE
Gasket	Silicone Rubber	Silicone Rubber	Silicone Rubber
Frequency range	DC~18 GHz	DC~11 GHz	DC~11 GHz
Nominal Impedance	50 Ω	50 Ω	50 Ω
Mating/Unmating	500 operations	500 operations	500 operations
Vibration	As per MIL-STD-202, method 204, test condition D		
Mechanical Shock	As per MIL-STD-202, method 213, test condition I		
Thermal Shock	As per MIL-STD-202, method 107, test condition B		
Humidity	As per MIL-STD-202, method 106		
Temperature Cycle	As per MIL-STD-202, method 102A, test condition C		

### Ordering Codes Description

MF02 - (Length) (Connector 1) (Connector 2)  
 □ □ - □ (□ / □) - □ (□ / □) - □  
**L L 1 2 3 1 2 3 U**

<b>LL</b>	Length	0.5 = 0.5 ; 1 = 1.0 ; 2 = 2.0
<b>1</b>	Connector Series	SMA = SMA ; N = N ; BNC = BNC; TNC = TNC
<b>2</b>	Male/Female Designator	M = Male ; F = Female
<b>3</b>	Orientation of Connector	ST = Straight ; RA = Right Angle
<b>U</b>	Unit of Length	M = Meter ; F = Feet ; I = Inch

1 meter cable set with SMA (Male) on both sides = MF02-1.0-SMA(M/ST)-SMA(M/ST)-M

Shown trademarks are property of their respective owners.

While the information contained herein in this catalog, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.

# Multi-Flex Low Loss, Pre-Connectorized Cable Sets, DC~18 GHz, MF02-Series

for rugged military, defense and T&M applications upto 18 GHz use

## Cable Set Ordering Codes

Ordering Code	Length	Insertion Loss (dB) Typical					
		1.5 GHz	3 GHz	6 GHz	9 GHz	12 GHz	18 GHz
<b>SMA (Male) Straight - SMA (Male) Straight (DC to 18 GHz)</b>							
MF02-0.5-SMA(M/ST)-SMA(M/ST)-M	0.5m	0.29	0.42	0.66	0.85	1.02	1.30
MF02-1.0-SMA(M/ST)-SMA(M/ST)-M	1m	0.52	0.79	1.20	1.54	1.84	2.38
MF02-2.0-SMA(M/ST)-SMA(M/ST)-M	2m	1.01	1.49	2.27	2.92	3.49	4.55
MF02-3.0-SMA(M/ST)-SMA(M/ST)-M	3m	1.48	2.22	3.34	4.29	5.15	6.71
MF02-5.0-SMA(M/ST)-SMA(M/ST)-M	5m	2.43	3.63	5.50	7.06	8.48	11.03
MF02-1.0-SMA(M/ST)-SMA(M/ST)-F	1 feet	0.19	0.30	0.44	0.58	0.68	0.88
MF02-2.0-SMA(M/ST)-SMA(M/ST)-F	2 feet	0.34	0.51	0.77	0.98	1.19	1.54
<b>SMA (Male) Straight - SMA (Male) Right Angle (DC to 12 GHz)</b>							
MF02-0.5-SMA(M/ST)-SMA(M/RA)-M	0.5m	0.31	0.46	0.67	0.87	1.05	-
MF02-1.0-SMA(M/ST)-SMA(M/RA)-M	1m	0.55	0.80	1.23	1.57	1.88	-
MF02-2.0-SMA(M/ST)-SMA(M/RA)-M	2m	1.04	1.52	2.28	2.94	3.53	-
MF02-3.0-SMA(M/ST)-SMA(M/RA)-M	3m	1.52	2.24	3.36	4.32	5.19	-
MF02-5.0-SMA(M/ST)-SMA(M/RA)-M	5m	2.46	3.66	5.53	7.09	8.52	-
MF02-1.0-SMA(M/ST)-SMA(M/RA)-F	1 feet	0.21	0.31	0.47	0.59	0.71	-
MF02-2.0-SMA(M/ST)-SMA(M/RA)-F	2 feet	0.36	0.52	0.80	1.02	1.22	-
<b>SMA(Male) Right Angle - SMA(Male) Right Angle (DC~12 GHz)</b>							
MF02-2RM-2RM-0.5M-T402-00	0.5m	0.32	0.48	0.71	0.89	1.06	-
MF02-2RM-2RM-1M-T402-00	1m	0.56	0.83	1.25	1.58	1.89	-
MF02-2RM-2RM-2M-T402-00	2m	1.05	1.54	2.32	2.96	3.55	-
MF02-2RM-2RM-3M-T402-00	3m	1.53	2.25	3.39	4.35	5.21	-
MF02-2RM-2RM-5M-T402-00	5m	2.48	3.67	5.54	7.11	8.52	-
MF02-2RM-2RM-1F-T402-00	1 feet	0.23	0.33	0.49	0.62	0.73	-
MF02-2RM-2RM-2F-T402-00	2 feet	0.39	0.55	0.82	1.04	1.24	-
<b>N (Male) Straight - N (Male) Straight (DC to 11 GHz)</b>							
MF02-0.5-N(M/ST)-N(M/ST)-M	0.5m	0.30	0.45	0.67	0.86	1.03	-
MF02-1.0-N(M/ST)-N(M/ST)-M	1m	0.54	0.80	1.21	1.55	1.85	-
MF02-2.0-N(M/ST)-N(M/ST)-M	2m	1.02	1.51	2.28	2.93	3.51	-
MF02-3.0-N(M/ST)-N(M/ST)-M	3m	1.50	2.23	3.36	4.31	5.17	-
MF02-5.0-N(M/ST)-N(M/ST)-M	5m	2.45	3.65	5.51	7.08	8.50	-
MF02-1.0-N(M/ST)-N(M/ST)-F	1 feet	0.20	0.31	0.46	0.59	0.70	-
MF02-2.0-N(M/ST)-N(M/ST)-F	2 feet	0.35	0.52	0.79	1.01	1.21	-
<b>SMA (Male) Straight - N (Male) Straight (DC to 11 GHz)</b>							
MF02-0.5-SMA(M/ST)-N(M/ST)-M	0.5m	0.29	0.44	0.66	0.85	1.02	-
MF02-1.0-SMA(M/ST)-N(M/ST)-M	1m	0.53	0.79	1.20	1.54	1.84	-
MF02-2.0-SMA(M/ST)-N(M/ST)-M	2m	1.01	1.50	2.27	2.92	3.50	-
MF02-3.0-SMA(M/ST)-N(M/ST)-M	3m	1.49	2.22	3.35	4.30	5.16	-

Shown trademarks are property of their respective owners.

While the information contained herein in this catalog, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.

## Cable Set Ordering Codes

Ordering Code	Length	Insertion Loss (dB) Typical					
		1.5 GHz	3 GHz	6 GHz	9 GHz	12 GHz	18 GHz
<b>TNC (Male) Straight - TNC (Male) Straight (DC to 11 GHz)</b>							
MF02-0.5-TNC(M/ST)-TNC(M/ST)-M	0.5m	0.32	0.47	0.70	0.88	1.05	-
MF02-1.0-TNC(M/ST)-TNC(M/ST)-M	1m	0.56	0.82	1.24	1.57	1.88	-
MF02-2.0-TNC(M/ST)-TNC(M/ST)-M	2m	1.04	1.53	2.30	2.95	3.53	-
MF02-3.0-TNC(M/ST)-TNC(M/ST)-M	3m	1.52	2.25	3.39	4.33	5.20	-
MF02-5.0-TNC(M/ST)-TNC(M/ST)-M	5m	2.47	3.67	5.53	7.10	8.53	-
MF02-1.0-TNC(M/ST)-TNC(M/ST)-F	1 feet	0.22	0.33	0.48	0.61	0.72	-
MF02-2.0-TNC(M/ST)-TNC(M/ST)-F	2 feet	0.37	0.54	0.81	1.03	1.23	-
<b>SMA (Male) Straight - Quick Lock (Male) Straight (DC~6 GHz)</b>							
MF02-0.5-SMA(M/ST)-QL(M/ST)-M	0.5m	0.35	0.51	0.76	-	-	-
MF02-1.0-SMA(M/ST)-QL(M/ST)-M	1m	0.59	0.87	1.29	-	-	-
MF02-5.0-SMA(M/ST)-QL(M/ST)-M	5m	2.50	3.71	5.59	-	-	-
MF02-1.0-SMA(M/ST)-QL(M/ST)-F	1 feet	0.25	0.37	0.55	-	-	-
MF02-2.0-SMA(M/ST)-QL(M/ST)-F	2 feet	0.40	0.59	0.87	-	-	-
<b>SMA (Male) Straight - Quick Lock (Male) Right Angle (DC~6 GHz)</b>							
MF02-0.5-SMA(M/ST)-QL(M/RA)-M	0.5m	0.36	0.52	0.77	-	-	-
MF02-1.0-SMA(M/ST)-QL(M/RAT)-M	1m	0.61	0.88	1.32	-	-	-
MF02-5.0-SMA(M/ST)-QL(M/RA)-M	5m	2.51	3.72	5.61	-	-	-
MF02-1.0-SMA(M/ST)-QL(M/RA)-F	1 feet	0.26	0.38	0.56	-	-	-
MF02-2.0-SMA(M/ST)-QL(M/RA)-F	2 feet	0.41	0.62	0.88	-	-	-
<b>SMA (Male) Straight - TNC (Male) Straight (DC~11 GHz)</b>							
MF02-0.5-SMA(M/ST)-TNC(M/ST)-M	0.5m	0.35	0.51	0.76	0.96	-	-
MF02-1.0-SMA(M/ST)-TNC(M/ST)-M	1m	0.59	0.87	1.29	1.65	-	-
MF02-5.0-SMA(M/ST)-TNC(M/ST)-M	5m	2.50	3.71	5.59	7.17	-	-
MF02-1.0-SMA(M/ST)-TNC(M/ST)-M	1 feet	0.25	0.37	0.55	0.69	-	-
MF02-2.0-SMA(M/ST)-TNC(M/ST)-M	2 feet	0.40	0.59	0.87	1.11	-	-
<b>N (Male) Straight - TNC (Male) Straight (DC~11 GHz)</b>							
MF02-0.5-N(M/ST)-TNC(M/ST)-M	0.5m	0.37	0.55	0.80	1.02	-	-
MF02-1.0-N(M/ST)-TNC(M/ST)-M	1m	0.61	0.90	1.34	1.71	-	-
MF02-5.0-N(M/ST)-TNC(M/ST)-M	5m	2.52	3.74	5.64	7.23	-	-
MF02-1.0-N(M/ST)-TNC(M/ST)-M	1 feet	0.28	0.41	0.60	0.75	-	-
MF02-2.0-N(M/ST)-TNC(M/ST)-M	2 feet	0.42	0.62	0.92	1.17	-	-

Shown trademarks are property of their respective owners.

While the information contained herein in this catalog, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.

## Specifications for MIL Use Semi-Flexible Low Loss RF Cable Sets

Length            Connector 1            Connector 2

- Should be flexible, easily routable
- Cable should conform to MIL standards MIL-C-17 and connectors to MIL-PRF-39012

### Cable Electrical Specifications

- Impedance: 50 ohms
- Frequency: DC~18 GHz
- Velocity of Propagation: 70 %
- Shielding Effectiveness: better than -90 dB
- Power Handling: > 145 Watts Average @3 GHz  
> 100 Watts Average @10 GHz  
> 45 Watts Average @18 GHz
- Insertion Loss : < 0.24 dB/feet @3 GHz  
< 0.46 dB/feet @10 GHz  
< 0.67 dB/feet @18 GHz
- VSWR : < 1.3 (DC~11 GHz) for SMA straight connector  
< 1.4 (11~18 GHz) for SMA straight connector  
< 1.35 (DC~7 GHz) for SMA right angle connector

### Cable Physical & Mechanical Specifications

- Construction should be double shielded for low loss
- Inner Conductor: Solid Silver Covered Copper
- Dielectric: PTFE
- Inner Shield: Silver Plated Copper Flat Ribbon Tape
- Outer Shield: Silver-Plated Copper Braid
- Jacket: Rugged Fluorinated Ethylene Propylene (FEP) suitable for harsh environment
- Overall diameter: < 4.15 mm
- Bending Radius: < 21 mm
- Temperature Range: -55°C ~ +125°C

### Connector Specifications (SMA)

- Outer Conductor: Stainless Steel/Brass, Gold plated
- Center Conductor: Brass, Gold Plated
- Insulation: PTFE
- Frequency range: DC~18 GHz (for SMA straight)  
DC~7 GHz for SMA right angle
- Should meet test conditions of MIL-STD-202 for vibration, mechanical shock, thermal shock, corrosion, humidity, temperature cycling

### Connector Specifications (N)

- Outer Conductor: Copper alloy
- Center Conductor: Brass, Gold Plated
- Insulation: PTFE
- Frequency range: DC~11 GHz for N straight  
DC~4 GHz for N right angle
- Should meet test conditions of MIL-STD-202 for vibration, mechanical shock, thermal shock, corrosion, humidity, temperature cycling

### Connector Specifications (TNC)

- Outer Conductor: Copper alloy
- Center Conductor: Brass, Gold Plated
- Insulation: PTFE
- Frequency range: DC~11 GHz for TNC straight
- Should meet test conditions of MIL-STD-202 for vibration, mechanical shock, thermal shock, corrosion, humidity, temperature cycling