


RG223 Pre-Connectorized Cable Sets, DC~6 GHz

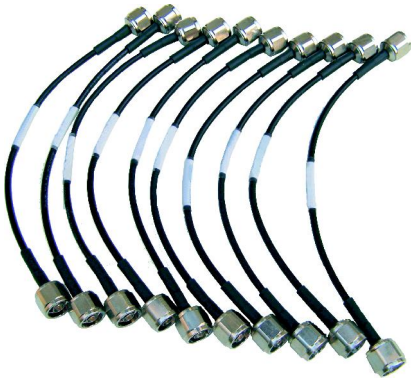

RG223 cable sets offered by us incorporate conformant MIL-C-17 cable and MIL-PRF-39012 connectors. We provide a variety of connectors like SMA, N, TNC, BNC.

QUICK TURNAROUND

- Stock of imported RG223 cable
- Stock of SMA (M), N(M) connectors

APPLICABLE MIL-STANDARDS

- MIL-C-17 (listed as M17/60-RG142)
- MIL-PRF-39012 for connectors

PHYSICAL & MECHANICAL SPECS OF CABLE

Inner Conductor	Silver Covered Copper Diameter 0.90mm, (0.0355 inch)
Dielectric	PE, Diameter 2.95mm (0.116 inch)
Shield	Silver Covered Copper Diameter 4.11 mm (0.162 inch)
Jacket	PVC, Diameter 5.38 mm (0.212 inch)
Temp. range	-40°C ~ +85°C

ELECTRICAL SPECIFICATIONS

Impedance	50Ω
Frequency	DC - 6 GHz
Capacitance	101.1 pF/meter 30.8 pF/feet
Weight	0.061 Kg/m

Attenuation & Power Handling Vs Frequency

Frequency (MHz)	10	30	50	100	400	1000	1500	2000	2500	3000	10000
Attenuation dB/100 feet	1.2	2.1	2.8	4	8	13	17	20	22	25	51
Power (Watts)	1080	619	476	333	161	97	78	66	58	52	24

Ordering Codes Description

RG223 - (Length) (Connector 1) (Connector 2)
 □ □ - □ (□ / □) - □ (□ / □) - □
 L L 1 2 3 1 2 3 U

LL	Length	0.5 = 0.5 ; 1 = 1
1	Connector Series	SMA = SMA ; N = N ; BNC = BNC ; TNC = TNC
2	Male/Female Designator	Male = M ; Female = F
3	Orientation of Connector	ST = Straight ; RA = Right Angle
U	Unit of Length	M = Meter ; F = Feet ; I = Inch

2 meter cable set with SMA (Male) on both sides = RG223-2.0-SMA(M/ST)- SMA(M/ST)-M

Shown trademarks are property of their respective owners.

While the information contained herein in this catalog, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.

Connector Specifications

Specifications	SMA Connectors	N Connectors	TNC Connectors
Outer Conductor	Brass, Gold plated	Brass Alloy, Ni plated	Brass, nickel alloy plated
Center Conductor	Brass, Gold Plated	Brass, Gold Plated	Brass, Gold Plated
Insulation	PTFE	PTFE	PTFE
Gaskets	Silicone rubber	Silicone rubber	Silicone rubber
Impedance	50 Ω	50 Ω	50 Ω
Frequency range	DC- 18 GHz	DC to 11 GHz	DC to 11 GHz
Mating/Unmating	500 operations	500 operations	500 operations
Vibration	As per MIL-STD-202, method 204, test condition D		
Mechanical Shock	As per MIL-STD-202, method 213, test condition I		
Thermal Shock	As per MIL-STD-202, method 107, test condition B		
Humidity	As per MIL-STD-202, method 106		
Temp. Cycle	As per MIL-STD-202, method 102A, test condition C		

Cable Set Ordering Codes

Part Number	Conn 1	Conn 2	Length	Insertion Loss (dB) Typical							
				100 MHz	400 MHz	1 GHz	1.5 GHz	3 GHz	4 GHz	6 GHz	
SMA(Male) Straight - SMA(Male) Straight (DC - 6 GHz)											
RG223-0.5-SMA(M/S)-SMA(M/S)-M	SMA(M)	SMA(M)	0.5m	0.09	0.17	0.28	0.35	0.52	0.61	0.77	
RG223-1.0-SMA(M/S)-SMA(M/S)-M	SMA(M)	SMA(M)	1m	0.15	0.31	0.5	0.63	0.93	1.09	1.38	
RG223-3.0-SMA(M/S)-SMA(M/S)-M	SMA(M)	SMA(M)	3m	0.41	0.85	1.38	1.73	2.55	3.01	3.83	
RG223-5.0-SMA(M/S)-SMA(M/S)-M	SMA(M)	SMA(M)	5m	0.67	1.38	2.26	2.83	4.18	4.94	6.28	
RG223-1.0-SMA(M/S)-SMA(M/S)-F	SMA(M)	SMA(M)	1 feet	0.06	0.12	0.2	0.25	0.36	0.42	0.53	
RG223-2.0-SMA(M/S)-SMA(M/S)-F	SMA(M)	SMA(M)	2 feet	0.1	0.2	0.33	0.41	0.61	0.71	0.9	
N (Male) Straight - N (Male) Straight (DC - 6 GHz)											
RG223-0.5-N(M/S)-N(M/S)-M	N(M)	N(M)	0.5 m	0.1	0.2	0.33	0.41	0.59	0.7	0.87	
RG223-1.0-N(M/S)-N(M/S)-M	N(M)	N(M)	1 m	0.16	0.34	0.55	0.68	1	1.18	1.49	
RG223-2.0-N(M/S)-N(M/S)-M	N(M)	N(M)	2 m	0.29	0.6	0.99	1.23	1.81	2.14	2.71	
RG223-3.0-N(M/S)-N(M/S)-M	N(M)	N(M)	3 m	0.42	0.87	1.43	1.78	2.63	3.1	3.93	
RG223-1.0-N(M/S)-N(M/S)-F	N(M)	N(M)	1 feet	0.07	0.15	0.24	0.3	0.43	0.51	0.64	
RG223-2.0-N(M/S)-N(M/S)-F	N(M)	N(M)	2 feet	0.11	0.23	0.38	0.47	0.68	0.8	1.01	
TNC (Male) Straight - TNC (Male) Straight (DC - 6 GHz)											
RG223-0.5-TNC(M/S)-TNC(M/S)-M	TNC(M)	TNC(M)	0.5 m	0.11	0.22	0.35	0.43	0.63	0.74	0.93	
RG223-1.0-TNC(M/S)-TNC(M/S)-M	TNC(M)	TNC(M)	1 m	0.17	0.35	0.57	0.71	1.04	1.22	1.54	
RG223-2.0-TNC(M/S)-TNC(M/S)-M	TNC(M)	TNC(M)	2 m	0.3	0.62	1.01	1.26	1.85	2.18	2.76	
RG223-3.0-TNC(M/S)-TNC(M/S)-M	TNC(M)	TNC(M)	3 m	0.43	0.89	1.45	1.81	2.66	3.14	3.99	
RG223-1.0-TNC(M/S)-TNC(M/S)-F	TNC(M)	TNC(M)	1 feet	0.08	0.16	0.26	0.32	0.47	0.55	0.69	
RG223-2.0-TNC(M/S)-TNC(M/S)-F	TNC(M)	TNC(M)	2 feet	0.12	0.24	0.4	0.49	0.72	0.84	1.06	

Shown trademarks are property of their respective owners.

While the information contained herein in this catalog, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.