



TMT-2000S





Soldering Station

TMT-2000S COMPONENTS



TMT-2000PS	Power Supply
SHH-4	Soldering Handpiece Holder
SHP-K	Soldering Handpiece
RMP-1	Tip Removal Pad
BC-1	Brass Curls
SPG-1	Sulphide Free Sponge
CC-1	Connection Cable

TMT-2000S SPECIFICATIONS


Input Line Voltage: TMT-2000PS	90-240 VAC, 80W
Tip to Ground Potential:	<2mV, true RMS 50-500Hz
Tip to Ground Resistance:	<2 Ohms DC
Idle temperature Stability:	+/- 1.1°C (2 °F)
Maximum Enclosure Temperature:	65°C (149 °F)
Fuse: TMT-2000PS	250V 1A
Output Power (Maximum):	50 Watts
Output Frequency:	470 KHz
Size (W x H x D):	110mm x 155mm x 92mm
Weight:	1.30 KG
Input Line Frequency:	50/60 Hz
Certification Marks:	   

www.thermaltronics.com

While the information contained herein in this catalog, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.




K-Series soldering tips for TMT2000S-K

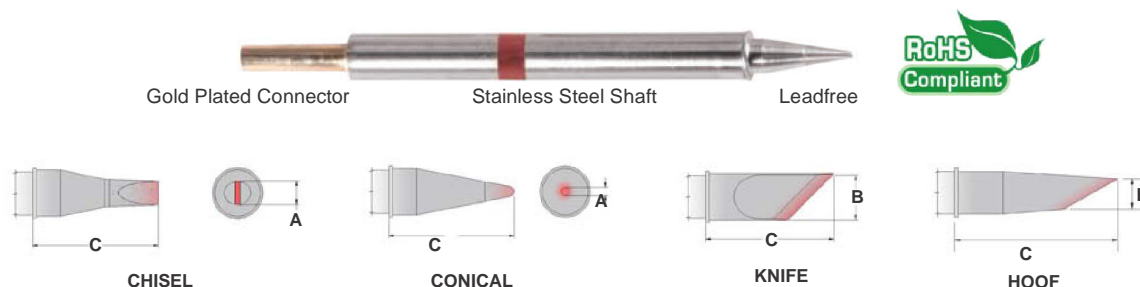

TT Part #	Type & Temperature	Shape	A(mm)	B(mm)	C(mm)
K60CH010	Type 60, 325~358°C	Chisel	1.00	-	11.40
K75CH010	Type 75, 350~398°C				
K80CH010	Type 80, 420~475°C				
K60CH015	Type 60, 325~358°C	Chisel	1.50	-	10.30
K75CH015	Type 75, 350~398°C				
K80CH015	Type 80, 420~475°C				
K60CH018	Type 60, 325~358°C	Chisel	1.78	-	10.20
K75CH018	Type 75, 350~398°C				
K80CH018	Type 80, 420~475°C				
K60CH025	Type 60, 325~358°C	Chisel	2.50	-	10.30
K75CH025	Type 75, 350~398°C				
K80CH025	Type 80, 420~475°C				
K60CH050	Type 60, 325~358°C	Chisel Large	5.00	-	
K75CH050	Type 75, 350~398°C				
K80CH050	Type 80, 420~475°C				
K60CP010	Type 60, 325~358°C	Conical	1.00	-	14.40
K75CP010	Type 75, 350~398°C				
K80CP010	Type 80, 420~475°C				
K60DS023	Type 60, 325~358°C	Hoof	-	2.30	18.20
K75DS023	Type 75, 350~398°C				
K80DS023	Type 80, 420~475°C				
K60DS045	Type 60, 325~358°C	Knife	-	4.50	16.65
K75DS045	Type 75, 350~398°C				
K80DS045	Type 80, 420~475°C				


While the information contained herein in this catalog, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.




Approvals



Sony Ericsson



MOTOROLA



Finisar

