

Harsh Military Applications Ultra Low Loss, Phase Stable

ULL05 series cable sets have been constructed specially for harsh military and defense applications demanding rugged interconnects with lowest loss and high phase stability. Ultra low loss cable and precision stainless steel connectors with split solder sleeves form the basis of this highly durable product.

- Proprietary Triple Shielded Ultra Low Loss Cable conformant to MIL-C-17
- MIL-PRF-39012 conformant connectors

CONFORMANT MIL STANDARDS

- Cable conforms to MIL-C-17
- Connectors conform to MIL-PRF-39012

CROSS REFERENCE

- Radiall SHF5M



APPLICATIONS

- Radar systems, electronic warfare
- Harsh military and defense system
- Interconnection of LRU's in military systems
- Environmental test chambers

Physical & Mechanical Specifications

Dimensions	inches	mm
Outer diameter	0.208	5.2
Bend Radius (minimum)	1	25
Weight	0.061 Kg/m	
Temperature Range	-55° ~ +125°C	

Electrical Specifications


Impedance	50 Ohms	
Velocity of Propagation	80 %	
Shielding Effectiveness	Better than 90 dB	
Capacitance	23.9 pF/ft	87 pF/m
Frequency Range	DC ~ 32.9 Ghz	
Insulation Resistance	> 5000 M Ohms	

Attenuation & Power Handling Data


Frequency	Insertion Loss		Av Power Watts
	dB/ft	dB/m	
1 GHz	0.08	0.26	715
2 GHz	0.11	0.37	495
3 GHz	0.14	0.45	400
4 GHz	0.17	0.55	350
6 GHz	0.20	0.65	276
8 GHz	0.21	0.70	240
10 GHz	0.23	0.79	210
12 GHz	0.26	0.87	190
18 GHz	0.33	1.12	150

While the information contained herein in this catalog, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.

Return Loss of 1 meter ULL05 cable set with SMA(M) on both sides

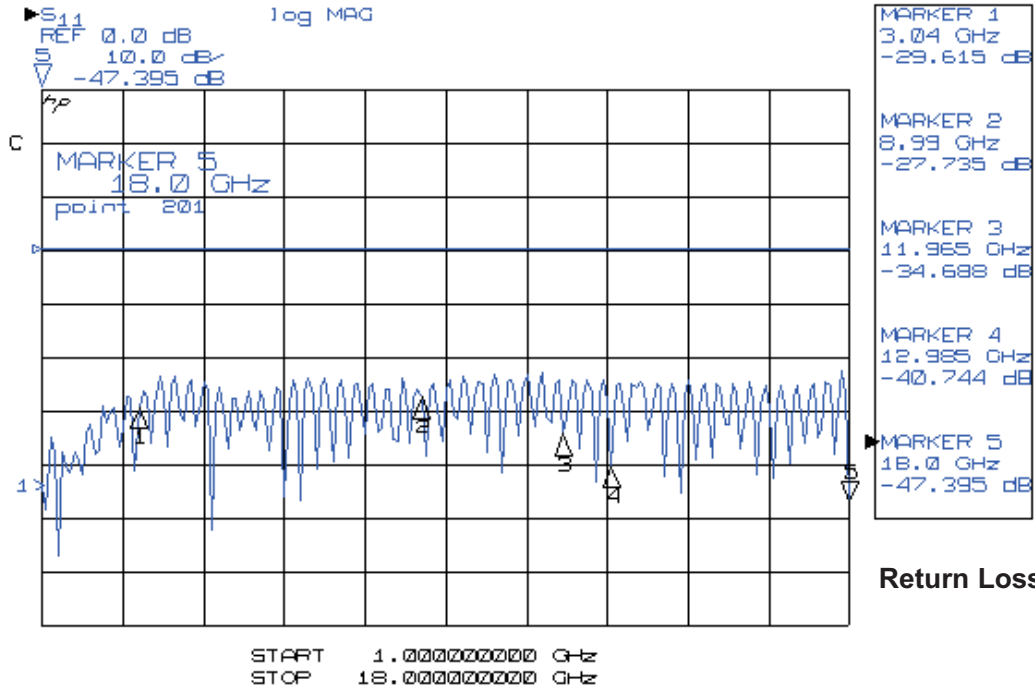


Insertion Loss of 1 meter ULL05 cable set with SMA(M) on both sides

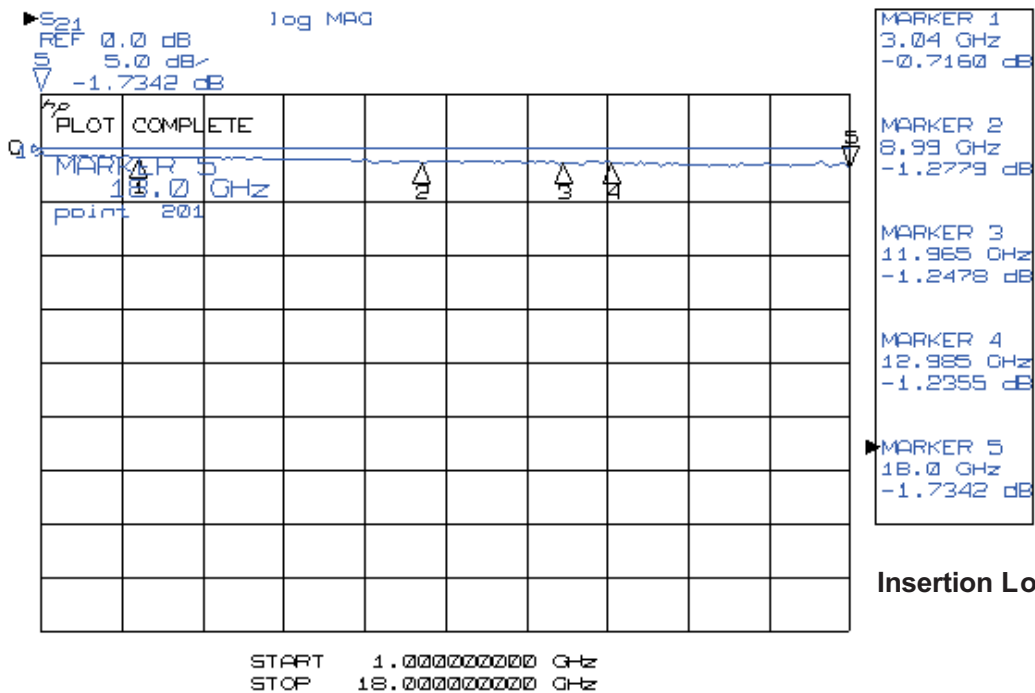

While the information contained herein in this catalog, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.

Imported Ultra Low Loss, Triple Shielded Hi-Power Cable details

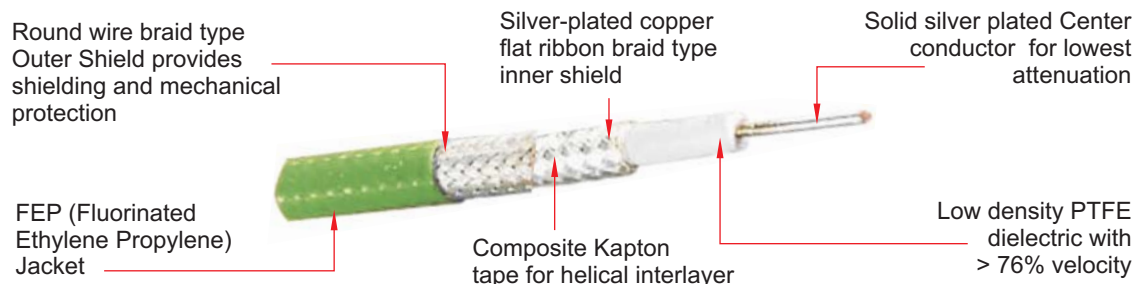

Ordering Codes Description

ULL05 / (Length) (Connector 1) (Connector 2)
 □ □ □ □ / □ □ □ / □ □ □
L L L L **1 2 3** **1 2 3**

1	Connector Series	C1 = SMA
2	Orientation of Connector	ST = Straight ; RA = Right Angle
3	Male/Female Designator	M = Male ; F = Female
LLLL	Length (meter) or (feet) or (Inches)	1 meter = 1M, 1 foot = 1F, 1 inch = 1IN

Cable Set Ordering Codes

Length	Ordering Code	Insertion Loss (dB) Typical					
		1.5 GHz	3 GHz	6 GHz	9 GHz	12 GHz	18 GHz
SMA (Male) Straight - SMA (Male) Straight (DC to 18 GHz)							
0.5m	ULL05-0.5-SMA(M/ST)-SMA(M/ST)-M	0.33	0.45	0.61	0.74	0.84	1.05
1m	ULL05-0.5-SMA(M/ST)-SMA(M/ST)-M	0.51	0.70	0.99	1.23	1.39	1.73
2m	ULL05-0.5-SMA(M/ST)-SMA(M/ST)-M	0.89	1.24	1.74	2.16	2.49	3.11
3m	ULL05-0.5-SMA(M/ST)-SMA(M/ST)-M	1.26	1.76	2.50	3.11	3.59	4.49
5m	ULL05-0.5-SMA(M/ST)-SMA(M/ST)-M	2.02	2.81	4.05	5.01	5.80	7.24
1 foot	ULL05-0.5-SMA(M/ST)-SMA(M/ST)-M	0.27	0.35	0.47	0.56	0.62	0.77
2 feet	ULL05-0.5-SMA(M/ST)-SMA(M/ST)-M	0.37	0.49	0.69	0.86	0.97	1.21

Connectors Specifications

Specifications	SMA Connectors
Construction	Solder Cup, Retaining Ring & Front End
Retaining Ring & Front End	Stainless Steel, Gold Plated
Center Conductor	BeCu, Gold Plated
Insulation	PTFE
Gasket	Silicone Rubber
Frequency range	DC~18 Ghz
Vibration	As per MIL-STD-202, method 204, test condition D
Mechanical Shock	As per MIL-STD-202, method 213, test condition I
Temperature Cycle	As per MIL-STD-202, method 102A, test condition C

While the information contained herein in this catalog, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.

Specifications for Ultra Low Loss Cable Assemblies

Length Connector 1 Connector 2

- Should be flexible and routable
- Cable should conform to MIL standards MIL-C-17 and Connectors should conform to MIL-PRF-39012

Electrical Specifications

- Impedance : 50 ohms
- Frequency : DC~18 GHz
- Velocity of Propagation : 76%
- Shielding Effectiveness : better than 90 dB
- Power Handling : > 390 Watts Average @3 GHz
> 200 Watts Average @10 GHz
> 135 Watts Average @18 GHz
- Insertion Loss : < 0.17 dB/feet @3 GHz
< 0.30 dB/feet @10 GHz
< 0.42 dB/feet @18 GHz
- VSWR : < 1.3 (DC~11 GHz) for SMA straight connectors
< 1.35 (11 ~ 18 GHz) for SMA straight connectors

Physical & Mechanical Specifications

- Construction should be triple shielded for low loss
- Inner Conductor : Solid Silver Covered Copper
- Dielectric : Low Density e-PTFE taped
- Inner Shield : Silver Plated Copper Flat Ribbon Tape
- Interlayer : Aluminium Polyester or polyimide tape
- Outer Shield : Silver Plated Copper Braid
- Jacket : Rugged Fluorinated Ethylene Propylene (FEP)
- Overall diameter : < 5.5 mm
- Bending Radius : < 25.4 mm (1 inch)
- Temperature Range : -55°C to +125°C
- Cable-Connector Retention : > 200 N

Connector Specifications

- Connector Construction : Split solder cup, retaining ring and connector front-end
- Retaining Ring : Stainless Steel, Passivated
- Connector Front-End : Stainless Steel, Passivated
- Center Conductor : Beryllium Copper, Gold Plated
- Insulation : PTFE
- Frequency range : DC~18 GHz
- Should meet test conditions of MIL-STD-202 for vibration, mechanical shock, thermal shock, corrosion, humidity, temperature cycling